


T-61.140 Signal Processing Systems


1st mid term exam, Mon 11.3.2002 15-18 hall M. Simula/Parviainen.

NO mathematical reference book, NO calculators are allowed. Formulae in the other side of this paper. Maximum points are 3+3+6+6=18.

- (5 x 1p, max 3p) Reply to **max three** claims, if they are right or wrong. Calculate or explain briefly.
 - $y[n] = (x[n])^2$ is a time-invariant LTI system.
 - $y[n] = 2x[n + 1]$ is a stable LTI system.
 - $y(t) = 2tx(t - 1)$ is a causal LTI system.
 - The operations in digital image processing (still-picture, gray scale) are always time-invariant (=shift-invariant), because the pixels do not carry any information of time.
 - The Fourier analysis used in LTI systems was developed in 1960's, in the era of the breakthrough of computers, in order to ease digital signal processing.
- (3p) In the figure below there is a signal (continuous -), whose "fundamental frequency" is 40 Hz (including some noise). A normal signal processing operation is executed with two different LTI systems, and the outputs are signals 1 (- -) and 2 (thick -.), respectively. What is this operation? How does it relate to basic filter types (lowpass/highpass/bandpass/bandstop)? Comment also the differences of systems/signals 1 and 2. Write down a few sentences, max one half page.

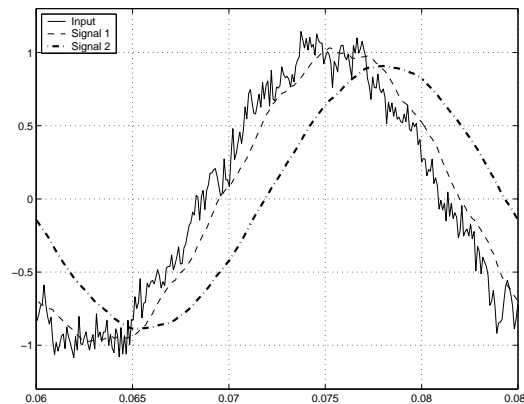

- (6p) Examine a cascade system of three LTI systems below. It is known that $h_1 = \delta[n] - \delta[n - 1]$ and the impulse response of the whole system is $h_c[n] = \delta[n - 2] + \delta[n - 3] - \delta[n - 4] - \delta[n - 5]$.



- Calculate the impulse response $h_2[n]$.
 - What is the output, when unit step $u[n]$ is fed into the system $h_c[n]$?
- (6p) The impulse response of a continuous-time LTI systems is defined by

$$h(t) = \delta(t) - e^{-t} u(t)$$

- Calculate $H(j\omega)$.
- Is $H(j\omega)$ lowpass or highpass filter? Hint: compute $|H(j\omega)|$ with few interesting frequencies.

- Let the input be a rectangular pulse $x(t) = \begin{cases} 2, & 0 < t < 1 \\ 0, & \text{elsewhere} \end{cases}$

Define the F-transform $Y(j\omega)$ of the output.