

No mathematical reference book. Formulae given - use them! A graphical calculator allowed (extra memory must be cleared).

2nd mid term exam: Write on top “MID TERM EXAM” and **reply to problems 3, 4, 5 and 6.**

Final exam: Write on top “FINAL EXAM” and **reply to problems 1, 2, 4, 5 and 6.**

- 1) (Final exam, 6p) Consider following continuous-time and discrete-time signals:

$$x_1[n] = \sin\left(\frac{27}{4}n\right)$$

$$x_2(t) = 2 \cos\left(\frac{27}{4}t + \pi/6\right)$$

$$x_3[n] = \sum_{k=-\infty}^{\infty} \{\delta[n - 3k - 1] + \delta[n - 3k - 2]\}$$

- a) Which of the signals are periodic? What is the fundamental period N_0 or T_0 of periodic signals?
- b) Determine the fundamental angular frequency ω_0 , Fourier-series coefficients and representation for the periodic signals in (a).
- 2) (Final exam, 6p) Consider a LTI system in Figure 1. It consists of two components, which are connected as shown in (b). The impulse response h_1 of the subsystem is $h_1[n] = \delta[n] - \delta[n-1]$. $h_2[n]$ is unknown. If there is an input $x[n]$ shown in Figure (a), the output $y[n]$ is like in (c).

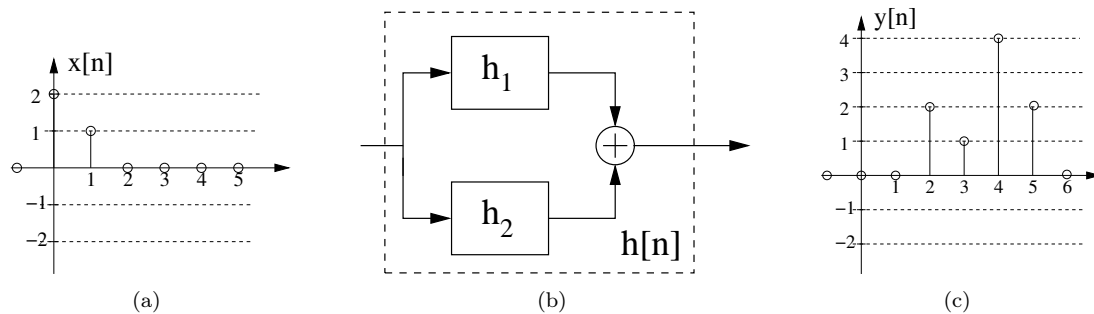


Figure 1: Problem 2: (a) Input $x[n]$, $x[n] = 0$, when $n < 0$, $n > 1$, (b) LTI system, (c) Output $y[n]$, $y[n] = 0$, when $n < 2$, $n > 5$, $n \in \mathbb{Z}$.

- a) Compute $y_1[n] = h_1[n] * x[n]$.
- b) Determine the values $h[0]$ and $h[1]$ of the impulse response.
- c) Determine the impulse response $h_2[n]$ of the unknown subsystem..
- d) If the input is $x_m[n] = -x[n-1]$, what is the output $y_m[n]$?

(F). Explain briefly but unambiguously.

- a) Let us know a real-valued sequence $x[n]$ and its discrete-time Fourier-transform $X(e^{j\omega})$. In frequency $\omega_c = \pi/6$: $X(e^{j(\pi/6)}) = (\sqrt{3}/2) + (1/2)j \approx 0.8660 + 0.5j$.
Statement: $\angle X(e^{j(-\pi/6)}) = -\pi/6$.
 - b) The frequency response $H(e^{j\omega}) = (-0.2 - e^{-j\omega}) / (1 + 0.2e^{-j\omega})$ is a highpass filter.
 - c) The rise time of a LTI filter $h_1[n] = \sum_{k=0}^9 \delta[n - k]$ is shorter than that of $h_2[n] = 10 \cdot \sum_{k=0}^{19} \delta[n - k]$. (Rise time is defined in the first page of formulae.)
 - d) It is possible to create a lowpass FIR filter so that its group delay is a nonzero constant.
- 4) (Final exam/Mid term exam, 6p) Consider a discrete-time system, whose block (flow) diagram is in Figure 2.

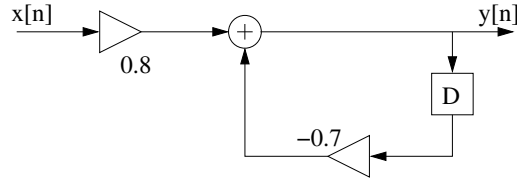


Figure 2: Block diagram in Problem 4.

- a) Is the filter FIR or IIR? Is the algorithm recursive or not? What is the order of the filter?
 - b) What is the frequency response $H(e^{j\omega}) = Y(e^{j\omega})/X(e^{j\omega})$.
 - c) Sketch the amplitude response $|H(e^{j\omega})|$. Is the filter of type lowpass, highpass, bandpass, bandstop or an allpass filter?
 - d) Determine the impulse response $h[n]$ by inverse transform or solving the difference equation.
- 5) (Final exam/Mid term exam, 6p) Consider an analog real signal which consists of four frequency components of form $\cos(2\pi f_k t)$. The spectrum of the signal is in Figure 3.

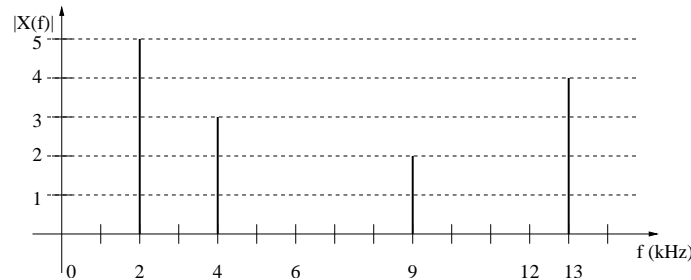


Figure 3: The spectrum of an analog real signal.

- a) Sample the signal with the sampling frequency $f_s = 12$ kHz. What is the time interval T_s ? between each sample?
- b) Determine and sketch the discrete-time spectrum $|X(e^{j\omega})|$ in range $0 \dots 6$ kHz.
- c) The original analog signal is filtered first with a lowpass filter

$$|H(j\omega)| = \begin{cases} 1, & 0 \leq f \leq 5 \text{ kHz} \\ 0.1, & f \geq 6 \text{ kHz} \end{cases}$$

The filter has a finite transition band at $5 < f < 6$ kHz. After that the signal is sampled with double sampling frequency $f_s = 24$ kHz. Sketch the discrete-time spectrum $|X_2(e^{j\omega})|$ in $0 \dots 12$ kHz.

6A) Consider a discrete-time system shown in Figure 4(a) with input $x[n]$ and output $y[n]$. LTI systems $H_{lp}(e^{j\omega})$ are ideal lowpass filters with cut-off frequency $\pi/4$ and passband amplification of unity. Sketch the output spectrum $|Y(e^{j\omega})|$ in range $(0, \pi)$, when the input is the spectrum $|X(e^{j\omega})|$ of a real-valued sequence $x[n]$ shown in (b). Use the w signals and properties of discrete-time Fourier-transform. Hint: $(-1)^n = e^{j\pi n}$.

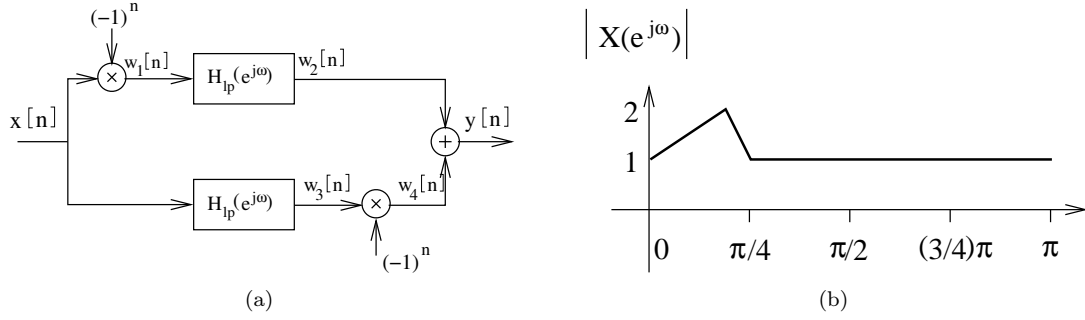


Figure 4: Problem 6A: (a) discrete-time system, (b) the amplitude spectrum $|X(e^{j\omega})|$.

the beginning of each line). It is applied to 2D-signal, which is represented with graylevel values (range 0-255) in Figure 5(a). Part of the pixels are totally white (255) and some are totally black (0).

```

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
01: figure, imshow(A,[0 255]); % plot the original figure (blood cells)
02: number_of_rows = size(A, 1);
03: number_of_cols = size(A, 2);
04: B = zeros(number_of_rows, number_of_cols); % initialize
05: C = zeros(number_of_rows, number_of_cols); % initialize
06: for m = 1 : number_of_rows
07:     for n = 1 : number_of_cols-2
08:         temp = A(m, n:n+2);
09:         B(m,n) = mean(temp);
10:         C(m,n) = median(temp);
11:     end;
12: end;
13: figure, imshow(B,[0 255])
14: figure, imshow(C,[0 255])
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%

```

Below there are four images. First one (a) is the input signal. Two images of (b-d) are output from the code above while one of them is from another operation. Explain what the program does, how does it relate to two images out of three (b-d), and why these two images look like they do. How does this problem relate to LTI filters in this course?

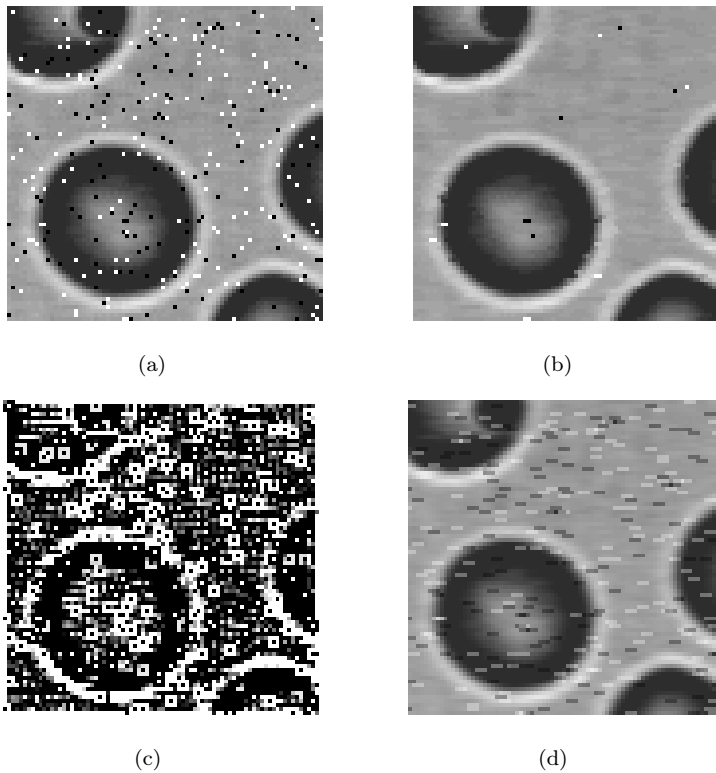


Figure 5: Images of Problem 6B: (a) original, (b)-(d) filtered images, two out of three images are from the code shown in the text.