Tik-61.231 Principles of Pattern Recognition

Answers to exercise 8: 18.11.2002

1. A grammar $G = (V_T, V_N, P, S)$ consists of the following entities:

   V_T, a set of terminal symbols,

   V_N, a set of nonterminal symbols,

   P, a set of production rules, and

   S, a set of starting symbols.

   Lets use the notations l (locomotive), v (luggage van), p (passenger coach), 1 (first class coach), d (dining car, interpreted as a special case of a passenger coach) and e (the end of the train, an empty symbol). Now we can draw a syntax diagram for the acceptable train structures:

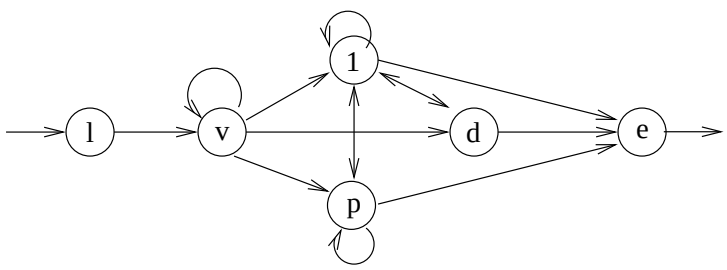

   The BNF (Backus-Naur-Form or Backus normal form) uses the symbols := as $\rightarrow$, | for 'or' and $< \cdots >$ for nonterminal symbols. The following grammar describes all possible trains:

$$
\begin{aligned}
V_T &= \{l, v, p, 1, d, e\} \\
V_N &= \{S, A, B, C, D, E\} \\
P &= \left\{ \begin{array}{l}
< S > := l < A > \\
< A > := v(< A > | < B > | < C > | < D >) \\
< B > := p(< B > | < C > | < E >) \\
< C > := 1(< B > | < C > | < D > | < E >) \\
< D > := d(< C > | < D > | < E >) \\
< E > := e
\end{array} \right\}
\end{aligned}
$$

   Now the parse tree for the example train $\{l, v, d, 1, p, p\}$ is:

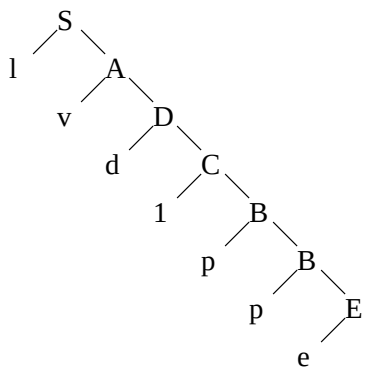

2. Now to check if the grammar accepts a train of the form $\{l, v, v, d, p, 1\}$. From the syntax diagram in the previous question we can instantly see, that the symbol d cannot be followed by p. Thus the grammar does not accept the train.

3. The grammar is

$$
\begin{aligned}
V_T &= \{o, a, \neg, +\} \\
V_N &= \{Square, Side1, Side2, Side3, Side4\} \\
P &= \left\{ \begin{array}{l} Square \rightarrow Side1 + Side2 + Side3 + Side4 \\ Side1 \rightarrow o | Side1 + o \\ Side2 \rightarrow a | Side2 + a \\ Side3 \rightarrow \neg o | Side3 + \neg o \\ Side4 \rightarrow \neg a | Side4 + \neg a \end{array} \right\} \\
S &= \{Square\}
\end{aligned}
$$

$$\Rightarrow L = \{(o|o^{n_1}) + (a|a^{n_2}) + (\neg o|(\neg o)^{n_3}) + (\neg a|(\neg a)^{n_4})\}$$

Where $n_1, n_2, n_3, n_4 \geq 1$, $|$ stands for 'or' and $a^n = a + a + a + \cdots + a$ (n a's).

a) Yes, the grammar produces squares if $n_1 = n_2 = n_3 = n_4$.

b) The grammar can produce several other structures, since the only constrained factor is the order of the turns; for example (when $n_1 = n_2 = n_3 = n_4$ doesn't hold)



c) The grammar can be made to produce only squares by constraining the length of each vertice to be equal,

$$L = \{o^n + a^n + (\neg o)^n + (\neg a)^n | n \geq 1\}$$

Thus the grammar is

$$
\begin{aligned}
V_T &= \{o, a, \neg, +\} \\
V_N &= \{N, A, V, Y\} \\
P &= \left\{ \begin{array}{r} N \rightarrow o + N + A + V + Y | o + A + V + Y \\ Y + A \rightarrow A + Y \text{ (correct order)} \\ V + A \rightarrow A + V \text{ (correct order)} \\ Y + V \rightarrow V + Y \text{ (correct order)} \\ o + A \rightarrow o + a \text{ (upper right corner)} \\ a + V \rightarrow a + \neg o \text{ (lower right corner)} \\ \neg o + Y \rightarrow \neg o + \neg a \text{ (lower left corner)} \\ a + A \rightarrow a + a \\ \neg o + V \rightarrow \neg o + \neg o \\ \neg a + Y \rightarrow \neg a + \neg a \end{array} \right\} \\
S &= \{N\}
\end{aligned}
$$

4. a) The regular EKG-form, as in *Syntactic PR, An Introduction, R.C. Gonzales and M.G. Thomason, Addison Wesley 1998*, is

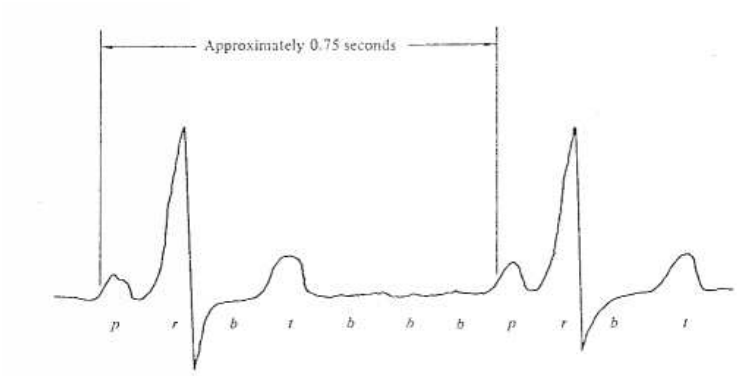

Figure 4.12. Normal human ECG.

The deterministic automaton thus becomes

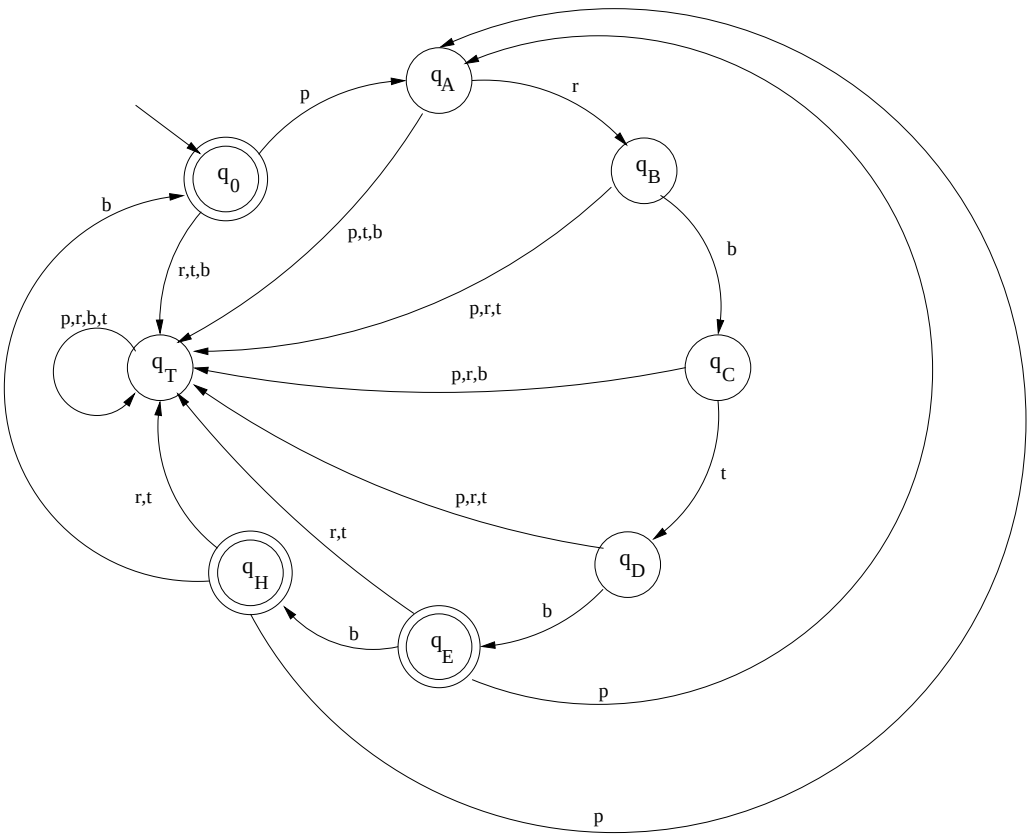

b) With the symbol sequence *prbtbprbtbbb*... the resulting state sequence is

$$q_0 \to q_A \to q_B \to q_C \to q_D \to q_E \to q_A \to q_B \to q_C \to q_D \to q_E \to q_H \to q_0$$

Now when the sequence starts again, the same route is traversed. As alarms are a result of the trap state q_T, which is not entered, no alarm is produced with this sequence.